

“The Best Hose Suspension in the World”



MODEL
HB 100 E
 For
 Hose I.D. 1” (2.5cm)



| | | |
|----------------------|--------------------------------|-----------------------------|
| Material: | URETHANE | |
| Length: | 16" / 40.6 cm | |
| Shipping Weight: | 3 lbs / 1.4 kgs | |
| Shipping Dimensions: | 21 x 8 x 4" / 53 x 21 x 10 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 16D | |
| *Sling height: | 8" / 20 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 1350 lbs/ 612 kgs 6.5:1 WLL | 437 kgs/ 964 lbs 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: The most popular petroleum hose model Used throughout the world of refueling stations.
 Often used conjunction with retroctors.
 CE certified slings available at a rated capacity of 500 kgs 6.7:1

“The Best Hose Suspension in the World”



MODEL
HB 125 ED

For
 Hose I.D. 1 1/2" (3.1cm)



| | | |
|----------------------|---------------------------------|------------------------------|
| Material: | URETHANE | |
| Length: | 17.5" / 44.45 cm | |
| Shipping Weight: | 3.5 lbs / 1.6 kgs | |
| Shipping Dimensions: | 21 x 8 x 4" / 53.4 x 21 x 10 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 16D | |
| *Sling height: | 7" / 17.8 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 1350 lbs / 612 kgs 6.5:1 WLL | 437 kgs / 964 lbs 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: Used with petroleum hose, refueling stations with hose retractors, hydraulic hose bundles and theatrical cabling.

CE certified slings available at a rated capacity of 500 kgs 6.7:1

“The Best Hose Suspension in the World”



MODEL
HB 150 ED

For

Hose I.D. 1½” (3.8cm)



| | | |
|----------------------|--|---------------------------------------|
| Material: | URETHANE | |
| Length: | 19.5" / 49.5 cm | |
| Shipping Weight: | 4 lbs / 1.8 kgs | |
| Shipping Dimensions: | 21 x 8 x 4" / 53 x 21 x 10 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 16D | |
| *Sling height: | 6.5" / 16.5 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 1350 lbs/ 612 kgs @ 5:1 WLL | 437 kgs/ 964 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: Often used for bundled hoses/cables, like theatrical cable for lighting and sound.
CE certified slings available at a rated capacity of 500 kgs @ 7:1

“The Best Hose Suspension in the World”



MODEL
HB 200 ED
For
Hose I.D. 2” (5 cm)



| | | |
|----------------------|--|---------------------------------------|
| Material: | URETHANE | |
| Length: | 18" / 45.7 cm | |
| Shipping Weight: | 4.5 lbs / 2 kgs | |
| Shipping Dimensions: | 21 x 8 x 4" / 53 x 21 x 10 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 16D | |
| *Sling height: | 7.25" / 18.4 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 1350 lbs/ 612 kgs @ 5:1 WLL | 437 kgs/ 964 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: Also available with Type 4 Hook-Eye sling (Model # RS 234H) for heavy duty jobs.
(WLL for RS 234H: 2000lb / 907kgs @ 5:1 or 648kgs / 1428lbs @ 7:1)
CE certified slings available at a rated capacity of 500 kgs @ 7:1

“The Best Hose Suspension in the World”



MODEL
HB 200 SRD
For
Hose I.D. 2” (5 cm)



| | | |
|----------------------|--|---------------------------------------|
| Material: | URETHANE | |
| Length: | 12" / 30.5 cm | |
| Shipping Weight: | 2.5 lbs / 1.1 kgs | |
| Shipping Dimensions: | 13 x 5 x 3.5" / 33 x 13 x 9 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 16D | |
| *Sling height: | 7.25" / 18.4 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 1350 lbs/ 612 kgs @ 5:1 WLL | 437 kgs/ 964 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: Also available with Type 4 Hook-Eye sling (Model # RS 234H) for heavy duty jobs.
(WLL for RS 234H: 2000lb / 907kgs @ 5:1 or 648kgs / 1428lbs @ 7:1)
CE certified slings available at a rated capacity of 500 kgs @ 7:1

“The Best Hose Suspension in the World”



MODEL
HB 300 D

For
Hose I.D. 3" (8 cm)



| | | |
|----------------------|---------------------------------|-------------------------------|
| Material: | URETHANE | |
| Length: | 12.75" / 32.4 cm | |
| Shipping Weight: | 4.25 lbs / 1.93 kgs | |
| Shipping Dimensions: | 13 x 6 x 5" / 32 x 15 x 12.5 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 234D | |
| *Sling height: | 8" / 20 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 2000 lbs/907 kgs @ 5:1 WLL | 648 kgs/1428 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: Hosebun for 3" (7.6 cm) hose with "D-Ring" sling attachment for easier mounting.
CE certified slings available at a rated capacity of 1000 kgs @ 7:1

“The Best Hose Suspension in the World”

MODEL

HB 300 H

For

Hose I.D. 3” (7.6 cm)



| | |
|--|---|
| Material: | URETHANE |
| Length: | 12.75" / 32.4 cm |
| Shipping Weight: | 4.25 lbs / 1.9 kgs |
| Shipping Dimensions: | 13 x 6 x 5" or 36 x 15 x 13 cm |
| Sling Type: | Type 4 Hook Eye |
| Sling Model: | RS 234H |
| *Sling height: <small>*Measured from top of the bun to the top of the sling</small> | 14.75" / 37.5 cm |
| Sling Material: | UV Resistant Treated Polyester |
| Rated Capacity: | 2000 lbs/907 kgs @ 5:1 WLL |
| | 648 kgs/1429 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C |

Notes: Hosebun for 3” (7.6cm) hose with type 4 hook eye sling for increased strength and work safety.
CE certified slings available at a rated capacity of 1000 kgs @ 7:1

“The Best Hose Suspension in the World”



MODEL
HB 400 D

For
Hose I.D. 4" (10 cm)



| | | |
|----------------------|--------------------------------|-------------------------------|
| Material: | URETHANE | |
| Length: | 11.5" / 21.22 cm | |
| Shipping Weight: | 5 lbs / 2.27 kgs | |
| Shipping Dimensions: | 13 x 8 x 7" / 32 x 20 x 18 cm | |
| Sling Model: | Metal "D-Ring" Sling | |
| Sling Type: | RS 234D | |
| *Sling height: | 8" / 20 cm | |
| Sling Material: | UV Resistant Treated Polyester | |
| Rated Capacity: | 2000 lbs/907 kgs @ 5:1 WLL | 648 kgs/1428 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C | |

*Measured from top of the bun to the top of the sling

Notes: Hosebun for 4" (10cm) hose with "D-Ring" sling attachment for easier mounting.
CE certified slings available at a rated capacity of 1000 kgs @ 7:1

“The Best Hose Suspension in the World”



MODEL

HB 400 H

For

Hose I.D. 4” (10 cm)



| | |
|--|---|
| Material: | URETHANE |
| Length: | 11.5” / 28.75 cm |
| Shipping Weight: | 5 lbs / 2.3 kgs |
| Shipping Dimensions: | 13 x 8 x 7” or 32 x 20 x 18 cm |
| Sling Type: | Type 4 Hook Eye |
| Sling Model: | RS 234H |
| *Sling height: <small>*Measured from top of the bun to the top of the sling</small> | 14.75” / 37.2 cm |
| Sling Material: | UV Resistant Treated Polyester |
| Rated Capacity: | 2000 lbs/907 kgs @ 5:1 WLL |
| | 648 kgs/1429 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C |

Notes: Hosebun for 4” (10cm) hose with type 4 hook eye sling for increased strength and work safety.
CE certified slings available at a rated capacity of 1000 kgs @ 7:1

“The Best Hose Suspension in the World”



MODEL

HB 600 H

For

Hose I.D. 6” (15 cm)



| | |
|--|---|
| Material: | URETHANE |
| Length: | 21.5” / 54.6 cm |
| Shipping Weight: | 17 lbs / 7.7 kgs |
| Shipping Dimensions: | 23 x 10 x 15” or 57 x 23 x 31 cm |
| Sling Type: | Type 4 Hook Eye |
| Sling Model: | RS 600H |
| *Sling height: <small>*Measured from top of the bun to the top of the sling</small> | 22.5” / 57.15 cm |
| Sling Material: | UV Resistant Treated Polyester |
| Rated Capacity: | 8000 lbs / 3629 kgs @ 5:1 WLL |
| | 2590 kgs / 5700 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C |

Notes: Use Heat Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW600). For 5” ID hoses, please ask us about our hosebun liners to ensure a secure fit. (Model# HBL 600). **CE certified slings available at a rated capacity of 3000 kgs @ 7:1**

“The Best Hose Suspension in the World”



MODEL

HB 800 H

For

Hose I.D. 8" (20 cm)



| | |
|---|--|
| Material: | URETHANE |
| Length: | 30.5" / 77.5 cm |
| Shipping Weight: | 37 lbs / 16.8 kgs |
| Shipping Dimensions: | 32 x 12 x 15" or 81 x 31 x 38 cm |
| Sling Type: | Type 4 HookEye |
| Sling Model: | RS 800H |
| *Sling height: <small>"Measured from top of the bun to the top of the sling"</small> | 18" / 45.7 cm |
| Sling Material: | UV Resistant Treated Polyester |
| flated φ' | 12000 lbs / 5443 kgs 5:1 WLL |
| | 3888 kgs / 8570 lbs B 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C |

Notes: Use Heat Wrap to extend temperature capacity up to 1 100°F/ 593°C (Models HW800).
CE certified slings available at a rated capacity of 4000 kgs 6 7:1 WLL

“The Best Hose Suspension in the World”



MODEL

HB 1000 H

For

Hose I.D. 10” (25 cm)



| | |
|---|---|
| Material: | URETHANE |
| Length: | 40.75” / 103.5 cm |
| Shipping Weight: | 62 lbs / 28 kgs |
| Shipping Dimensions: | 42 x 15 x 18" or 106 x 37.5 x 46 cm |
| Sling Type: | Type 4Hook Eye |
| Sling Model: | RS 1000H |
| *Sling height: <small>"Measured from top of the bun to the top of the sling"</small> | 19.25” / 48.90 cm |
| Sling Material: | UV Resistant Treated Polyester |
| Fated Capacity. | 15000 lbs / 6803 kgs 5n1 WLL |
| | 4sao xgs / iozooias @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3• C |

Notes: Use Heat Wrap to extend temperature capacity up to 1100°F/ 593°C (Models HW 1000).
CE certified slings available at a rated capacity of 5000 kgs 6 7:J WLL

“The Best Hose Suspension in the World”



MODEL

HB 1200 H

For

Hose I.D. 12” (30 cm)



| | |
|--|-------------------------------------|
| Material: | URETHANE |
| Length: | 40.75” / 103.5 cm |
| Shipping Weight: | 62 lbs / 28 kgs |
| Shipping Dimensions: | 42 x 15 X 18" 106 x 37.5 x 46 cm |
| Sling Type: | Type 4 Hook Eye |
| Sling Model: | RS 1200H |
| °Sling height: <small>*Measured from top of the bun to the top of the sling</small> | 23.25” / 59.1 cm |
| Sling Material: | UV Resistant Treated Polyester |
| 20Ted capacity. | 15000 lbs / 6803 kgs 5•1 WLL |
| | 4sao xgs / iozoo ias B 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C |

Notes: Same mold as the HB 1000H but with a longer sling to accommodate a 12” (30cm) I.D. hose. Use Heal Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW 1200). CE certified slings available at a rated capacity of 5000 kgs 6 7:J WLL

“The Best Hose Suspension in the World”



MODEL

HB 1200 H

For

Hose I.D. 12” (30 cm)



| | |
|--|--|
| Material: | URETHANE |
| Length: | 40.75” / 103.5 cm |
| Shipping Weight: | 62 lbs / 28 kgs |
| Shipping Dimensions: | 42 x 15 x 18” or 106 x 37.5 x 46 cm |
| Sling Type: | Type 4 Hook Eye |
| Sling Model: | RS 1000H |
| *Sling height: <small>*Measured from top of the bun to the top of the sling</small> | 23.25” / 59.1 cm |
| Sling Material: | UV Resistant Treated Polyester |
| Rated Capacity: | 15000 lbs / 6803 kgs @ 5:1 WLL |
| | 4860 kgs / 10700 lbs @ 7:1 WLL |
| Maximum Temperature: | 200° F / 93.3° C |

Notes: Same mold as the HB 1000H but with a longer sling to accommodate a 12” (30cm) I.D. hose. Use Heat Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW 1200). CE certified slings available at a rated capacity of 5000 kgs @ 7:1 WLL

“The Best Hose Suspension in the World”



HOSECADDY™™
MODEL
HC 1000 /1200 (A or M)



| | |
|-----------------|---|
| Aluminum: | Our Hosecaddy™ a-frame is made of 1/4" thick hardened aluminum plate, then powder coated Inferno Orange. Shipped in 1 box. |
| Steel: | Our Hosecaddy™ m-frame is made of steel construction, which then undergoes hot dipped galvanization and powder coated Inferno Orange. Shipped in 2 boxes. |
| Weight: | Model #HC 1000/1200 A: Aluminum Frame: 59lbs / 27kgs Model #HC 1000/1200 M: Steel Frame: 82lbs / 37kgs |
| Dimensions: | 43 x 20.25 x 11" / 109 x 51.4 x 28 cm |
| Load Capacity | Heavy duty, easy rolling 6" (15 cm) swivel castors, have a working load capacig of 1600 lbs / 726 kgs. |
| Hose Dimensions | Designed for 6" to 12" (15-30 cm) large bore hose or a bundle of small 3-4" (8-10 cm) hoses. |

Notes: Also available: Model#: HC 1600 -

Heavy duty model with 2" (5 cm) wider base and extra base support for more strength.
- for hoses with an ID of 16" & OD of up to 18"
- Aluminum Only.

“The Best Hose Suspension in the World”



HOSEHORSE *^o
MODEL
HH

•Model6 HN 24-2345
 -Fits OD Hose up to:
 5.5" / 14cm
 - Ship Weight:
 5lbs / 2.3kgs



| | |
|------------------|--|
| Material: | Molded Plastic |
| Shipping Weight: | From 4 to 1B lbs; depending on model |
| Dimensions: | Depends on Model |
| Hose Dimensions: | Models available to fit hose sizes from 2" / 5.1cm, up to, 24" / 61 cm |

Model# HH 24-6
 - 24" / 91cm High
 - Fits 6" / 15.24cm
 OD Hose
 -Square bottom
 - Red Only
 - Ship Weight:
 9 lbs / 4.08kgs
 - Ratches & Straps avail.



Model# HH 24-1012
 - 24" / 91cm High
 - Fits OD Hose
 10-12" / 25-30cm
 - Comes with
 Ratchets & Straps
 - Ship weight:
 1B lbs / 52 kgs



“the Best Hose Suspension in the World”




HoseHOG™
MODEL
HG 7-234

Hoses are laid on top of rocks and the vibration from the pumps extend into the hoses and pin holes occur.

How do you prevent the costly event of a spill from OIL PRODUCED FLUID or ANYTHING THAT IS HAULED?

the answer is simple!

HoseHOG : Hose off Ground

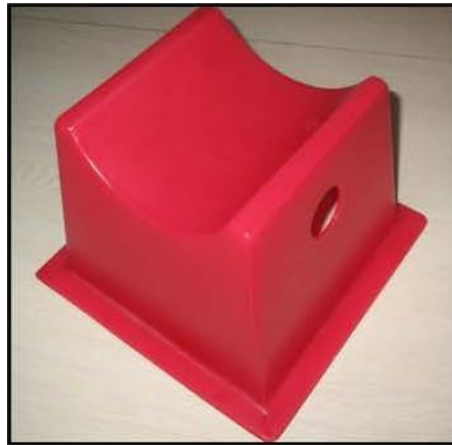

| | |
|------------------|--|
| Material: | f4ade of Polyurethane |
| Weight: | 1.2lbs / .55kgs ; Easy to set up on your truck. |
| Height: | Stands 7" high |
| Hose Dimensions: | The contoured radius of the HoseHOG accomodates 2", 3" and 4" ID hoses |